

WAREWASHER AX-50 (13 AMP)

Rack size 500x500mm and door clearance 380 mm



"Easy grip" door: new design with integrated door handle

- √ The integration of the components provides greater resistance and robustness.
- Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal
- 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39

Warewashing, made simple

- ✓ Active Xperience: simple and intuitive use
- Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Electronic control panel with IP65 humidity protection.

You will never WASH ALONE

- Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- √ 60 years of experience and know-how at your disposal.

INCLUDES

- ✓ Peristaltic Detergent Pump
- 1 mixed basket (plates).
- √ Rinse aid pump.
- 1 small basket for cutlery.
- √ 1 glasses basket.

OPTIONAL

- Overflow drainage pump. Tank water renewal by the principle of density.
- Double-level accessory for washing two baskets at the same time.

Accessories

☐ Double rack kits for AX/UX

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm

Useful height: 380 mm

Production baskets / hour: 30 / 24 / 17

Wash temperature: 55°C - 65°C Rinse temperature: 75°C - 80°C

- √ Boiler capacity: 4.5 I
- √ Wash tank capacity: 14 I
- √ Water consumption/cycle: 2.7 I

External dimensions (W x D x H)

Loading

Pump: 500 W / 0.75 Hp

Tank: 1800 W Boiler: 2500 W Total loading: 3000 W

√ Width:580 mm

- ✓ Depth: 635 mm
- ✓ Height: 835 mm

Net weight: 55 kg

Crated dimensions

640 x 695 x 960 mm

SALES DESCRIPTION

Sani-Control: guaranteed disinfection

Embedded bodywork and easy-grip door: hygienic and ergonomic

Exclusive Hydroblade™ washing arms: maximum effectiveness.

3-stage filtering system.

Double-walled body (partial).

Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN
- √ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

New recessed bodywork

- Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- Compact tank volume (50% water saving compared to the previous range).
- ✓ Embedded basket guides

Hydroblade™ washing arms

- Redesigned nozzles for greater washing performance.
- The "monoblock" design delivers durability and resistance to impacts.
- √ 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- Keeps the washing water in optimal conditions to maintain constant washing performance.
- The surface filters feature an "easy-on" design and can be quickly removed without having to disconnect the washing arms.








WAREWASHER AX-50 (13 AMP) Rack size 500x500mm and door clearance 380 mm

AVAILABLE MODELS

1303183 AX-50 230/50/1 DD

* Ask for special versions availability

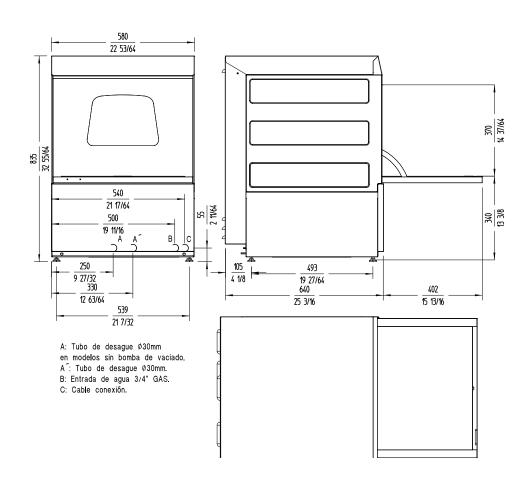



www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



	Project	Date
	Item	Qty

Approved